




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01C 21/20, G06F 1/32	A1	(11) International Publication Number: WO 99/53272 (43) International Publication Date: 21 October 1999 (21.10.99)
<p>(21) International Application Number: PCT/US99/07424</p> <p>(22) International Filing Date: 2 April 1999 (02.04.99)</p> <p>(30) Priority Data: 09/060,899 15 April 1998 (15.04.98) US</p> <p>(71) Applicant: MAGELLAN DIS, INC. [US/US]; 2950 Water-view, Rochester Hills, MI 48309 (US).</p> <p>(72) Inventors: KIRKHART, Michael, O.; 24549 Seaton Circuit, Warren, MI 48091 (US). SPENCER, Larry, E., II; 525 Joslyn Road, Lake Orion, MI 48362 (US).</p> <p>(74) Agents: CARLSON, John, E. et al.; Howard & Howard Attorneys, P.C., Suite 101, 1400 North Woodward Avenue, Bloomfield Hills, MI 48304 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: VEHICLE NAVIGATION SYSTEM WITH IMPROVED POWERUP PERFORMANCE

(57) Abstract

A navigation system includes a driver presence sensor and engine running detection circuitry. When the detection circuitry determines that the engine of the vehicle is not running, the navigation system enters a low power mode. When the presence of the driver is detected, the navigation system begins power up, switching from a low power to a full power operational mode. If the detection circuitry does not determine that the engine is running within a predetermined time period, the navigation system reenters the low power mode. The detection circuitry monitors the vehicle's electrical system and determines that the engine is running when an AC content exceeds a predetermined threshold.

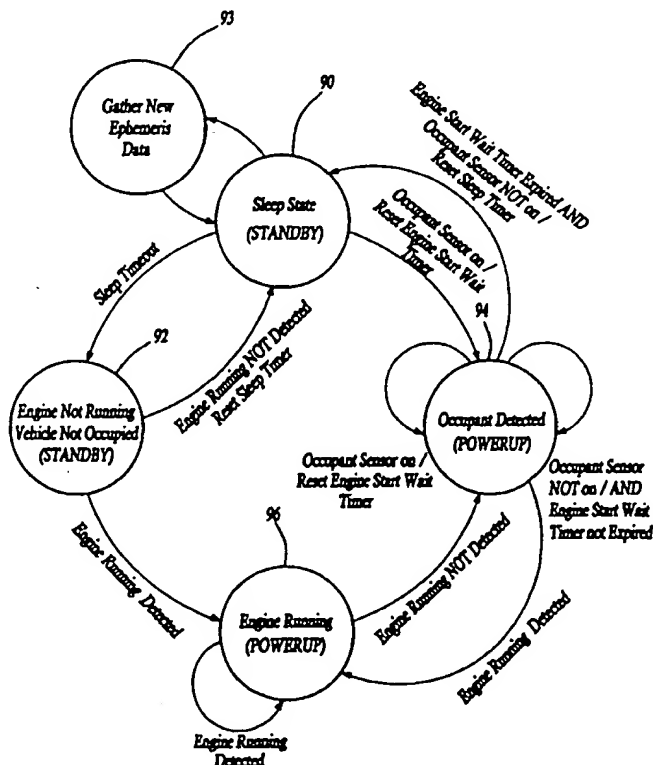

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

VEHICLE NAVIGATION SYSTEM WITH IMPROVED POWERUP PERFORMANCE

BACKGROUND OF THE INVENTION

5 The present invention relate generally to vehicle navigation systems and more particularly to a vehicle navigation system with improved startup performance.

 Known vehicle navigation systems generally include a plurality of motion and position determining devices, such as a GPS receiver, accelerometers, gyros, wheel speed sensors, etc. The navigation system further includes a CPU receiving data from
10 all of the sensors and having a hard drive containing a database of roads which may be traveled by the vehicle. As is generally known, the navigation system determines the position of the vehicle relative to the database of roads and displays the current position of the vehicle on a display. Further, the driver can select a destination relative to the database of roads. The navigation system then displays turn-by-turn instructions to the
15 driver to guide the driver to the selected destination.

 In order to conserve battery power, navigation systems generally enter a "low power" mode when the vehicle engine is not running. In low power mode, the hard drive is not spinning, the CPU is not booted, the sensors do not consume power and the GPS receiver does not receive GPS signals. To determine whether the engine is
20 running, the current systems are connected to the "ON" position of the vehicle ignition switch. When the ignition switch is turned to the ON position, the navigation system switches from low power mode to full power mode. At that time, the hard drive in the navigation system starts spinning, the CPU is booted, the motion sensors begin to warmup and stabilize, and the GPS receiver receives GPS signals and begins calculating
25 a GPS position solution. This "warmup" period by the navigation system components requires time during which the driver of the vehicle may be taking other actions that the navigation system needs to monitor in order to know the current position of the vehicle. It would be difficult and undesirable to force the vehicle to remain still while the navigation system is in the warmup period. In cold weather, this warmup period could
30 be 30 seconds or more.

 Additionally, startup performance of the navigation system is closely related to the GPS receiver's "time to first fix." To minimize this time, it is important for the GPS receiver to have fresh satellite ephemeris data. This data, which is used to determine the precise location of the GPS satellites, typically needs to be refreshed at

least every four hours. If the vehicle is parked for more than four hours, the GPS receiver must first obtain fresh ephemeris data before calculating an accurate position solution. This further delays the startup performance of the vehicle navigation system.

5

SUMMARY OF THE INVENTION

The present invention provides a vehicle navigation system having improved powerup performance. The vehicle navigation system includes a sensor for detecting the presence of the driver, such as a motion sensor. When the sensor determines that the driver is present, the navigation system enters the warmup period, switching from
10 low power mode to full power mode. The hard drive starts spinning, the CPU is booted, the sensors begin warmup and the GPS receiver and CPU begin calculating a GPS position solution. By the time the driver enters the vehicle and starts the car, the navigation system is operational.

If the presence of the driver is detected, but the vehicle engine is not running
15 within a predetermined time period, the navigation system returns to the low power mode. This reduces power consumption in the event of a false detection of the driver's presence, or if the driver did not start the vehicle.

The vehicle navigation system can monitor the ignition switch of the vehicle to determine if the engine is running within the time period; however, preferably the
20 vehicle navigation system includes engine running detection circuitry which simply monitors the power supply from the vehicle to the vehicle navigation system. The engine running detection circuitry monitors the electrical power supply of the vehicle. When the engine is not running, the voltage of the vehicle power supply is a fairly constant DC voltage, typically 12 to 14 volts. When the engine is running, there is a
25 measurable AC voltage superimposed on the DC power supply output. The AC voltage is a result of transients generated by the ignition system primary circuit and charge of pulses from the generator/alternator.

Generally, the engine running detection circuitry monitors the amplitude of the AC content. The engine running detection circuitry may use both time and frequency
30 domain techniques to monitor the AC content in the vehicle power supply. When the AC content exceed a predetermined threshold, the engine running detection circuitry determines that the engine is running. When the AC content falls below the predetermined threshold, the engine running detection circuitry determines that the

engine is not running. If the engine running detection circuitry determines that the engine is not running within a predetermined time period after the presence of the driver has been detected, the navigation system reenters the low power standby mode. While the engine is running, the navigation system continues to operate at full power. When
5 the engine running detection circuitry determines that the engine is not running for a predetermined time period, the navigation system enters the low power standby mode.

BRIEF DESCRIPTION OF THE DRAWINGS

Other advantages of the present invention will be readily appreciated as the same
10 becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

Figure 1 is a schematic of the navigation system of the present invention installed in the vehicle;

Figure 2 is a lower level schematic of the navigation system of Figure 1;

15 Figure 3 is a detailed schematic of the conditioning circuitry of Figure 2; and

Figure 4 is a high-level state diagram of the operation of the navigation system of Figure 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

20 The navigation system 20 of the present invention is shown schematically in Figure 1. The navigation system 20 includes a CPU 22 connected to a display 24, such as a high resolution LCD or flat panel display. The CPU 22 is also connected to an input device 26 such as a mouse, keyboard, key pad or remote device. Alternatively, the display 24 can be a touch screen display. The navigation system 20 further includes
25 a storage device 28, such as a hard drive 28 or CD ROM, connected to the CPU 22. The storage device 28 contains a database including a map of all the roads in the area to be traveled by the vehicle 32 and may contain the software for the CPU 22, including the graphical user interface, route guidance, operating system, position-determining software, etc.

30 The navigation system 30 preferably includes position and motion determining devices, such as a GPS receiver 34, a gyroscope 36, a compass 38, a wheel speed sensor 40 and an orthogonal multiple axis accelerometer 41 all connected to the CPU 22 (connections not shown for simplicity). Such position and motion determining

devices are well known and are commercially available. A vehicle security system 42, preferably including a remote entry system having a remote 44, is installed in the vehicle 32. Generally, the components described above are powered by the vehicle's electrical system, which preferably includes the vehicle battery 48. The navigation system 20 further includes detection circuitry 50 connected to the vehicle's electrical system or battery 48 and sending a signal to the CPU 22. Although the detection circuitry 50 is shown as a separate component, it could be located on the CPU 22.

The navigation system 20 determines the position of the vehicle 32 relative to the database of roads utilizing the position and motion determining devices. The driver selects a destination relative to the database of roads utilizing the user input device 26 and the display 24. The navigation system 20 then displays turn-by-turn instructions to the driver to guide the driver to the desired destination from the present position.

Figure 2 is a lower level schematic of the navigation system 20 of the present invention. As can be seen in Figure 2, the detection circuitry 50 generally comprises conditioning circuitry 52, which will be described in more detail below, an analog to digital converter 54 and a microcontroller 56, preferably a Microchip PIC12C671 or PIC12C672. The detection circuitry 50 monitors the voltage on the vehicle electrical system or battery 48. Because the vehicle's electrical system or battery 48 will typically be around 12 to 14 volts DC, the conditioning circuitry 52 filters out the DC component of the power signal from the battery 48 and shifts the voltage to the middle of the range of inputs of the analog to digital converter 54. The microcontroller 56 periodically samples the output from the analog to digital converter 54 to measure the AC content of the power supply signal from the battery 48. Preferably, the microcontroller 56 samples the output from the analog to digital converter 54 every millisecond.

The microcontroller 56 preferably compares the largest peak to peak voltage variation over a one second interval to a predetermined threshold, such as 100 to 300 millivolts. The specific threshold may depend upon the specific vehicle into which the navigation system 20 is installed. Further, the microcontroller 56 may also perform a Fourier or wavelet transform on the sampled AC content and look for signal content at certain frequencies to determine whether the engine is running. Again the spectral analysis of the signal may depend upon the specific vehicle into which the navigation system 20 is installed. Those skilled in the art would be able to adapt the detection

circuitry 50 to a specific vehicle by observing the AC content while the engine is running versus not running.

5 If the detection circuitry determines that the AC content of the power supply signal indicates that the engine is running, the microcontroller 56 generates an engine running signal, indicating that the engine is running. If the AC content of the power supply signal does not exceed the predetermined threshold, the detection circuitry 50 determines that the vehicle engine is not running, and does not generate an engine running signal.

10 The detection circuitry 50 may also monitor the vehicle power supply to determine the presence of the driver. When the doors are unlocked using a keyless entry fob, the automatic door lock actuators will generate a transient on the vehicle electrical system that the detection circuitry 50 will detect as a short duration AC signal. Moreover, when the door is opened and the interior lights are turned on, a transient will be generated on the vehicle electrical system which the detection circuitry can
15 recognize. In either event, the detection circuitry 50 determines the presence of the driver approaching or entering the vehicle 32.

The detection circuitry 50 may alternatively receive a signal from the vehicle security system 42 indicating the presence of the driver in or near the vehicle 32. This signal may be generated by a sensor 60 which is part of the vehicle security system 42.
20 As is generally known in vehicle security systems, the sensor 60 may comprise a motion sensor, door pin switches, vibration sensor, noise sensor, or other sensors known in the vehicle security art. Additionally, or alternatively, the presence of the driver may be indicated by the remote entry sensor 62, which may also be integrated with the vehicle security system 42. As is generally known, the remote entry sensor 62 receives an RF
25 or infrared signal from the remote entry remote 44, which is typically carried by the driver. Alternatively, the presence of the driver may be detected by the accelerometer 41 which is part of the navigation system 20.

When the presence of the driver is detected by the detection circuitry 50, either by monitoring the AC content or the vehicle security system 42, the detection circuitry
30 50 selectively sends a warmup signal to the CPU 22 which may be relayed to the other electrical components 24, 34, 36, 38, 40, 28. Alternatively, as shown in phantom, the detection circuitry 50 can send the warmup signal directly to each of the components, indicated collectively as components 66.

The conditioning circuitry is shown in more detail in Figure 3. The conditioning circuitry 52 receives the power supply signal at input 72 and filters out the DC and lower frequency components with capacitor 74 and resistor 76. Capacitor 74 is preferably 0.1 microfarads to 0.2 microfarads. Resistor 76 is preferably 100 Ohms. This places the AC content of the power supply signal at a voltage divider circuit, which comprises two 100k Ohm resistors 78 connected to a 3.3 volt power supply. This places the AC content of the power supply signal in the middle of the range of the analog to digital converter 54 and provides the maximum available peak to peak input voltage swing. A diode 80 may be coupled to the output 82.

The operation of the vehicle navigation system 20 will be described by referring to Figure 2 and a state diagram shown in Figure 4. When the vehicle engine is not running, the vehicle power supply or battery 48 provides a fairly constant DC voltage, preferably 12 to 14 volts. The DC component of the power supply signal is filtered out by the conditioning circuitry 52 and the peak to peak AC content of the power supply signal does not exceed the predetermined threshold. Therefore, the microcontroller 56 in the detection circuitry 50 determines that vehicle engine is not running, and so indicates to the CPU 22 and other electrical components 24, 28, 34, 36, 38 and 40. These electrical components then enter a low power mode in state 90 to conserve power. As will be recognized, some of these electrical components require some power even in low power mode.

Periodically, (preferably approximately every second) the microcontroller 56 exits low power mode (state 90) and checks whether the engine is running. If the detection circuitry 50 detects that the engine is running, even if the presence of the driver has not be detected, the detection circuitry 50 indicates to the CPU 22 and other electrical components to switch to full power in state 96.

Preferably, the CPU 22 and GPS receiver 34 also switch on briefly every four hours in state 93. In state 93, the GPS receiver 34 collects and stores fresh ephemeris data. The CPU 22 and GPS receiver 34 then reenter low power mode in state 90 for up to four more hours. If the GPS receiver 34 is unable to receive a satellite signal and obtain fresh ephemeris data within a predetermined time period (approximately 90 seconds), the CPU 22 and GPS receiver 34 reenter low power mode in state 90. If the GPS receiver 34 is unable to receive a satellite signal after several tries (such as three or four), the microcontroller 56 does not enter state 93 for additional attempts until after

the engine is started. This would indicate that the vehicle 32 may be parked for a long period in a parking structure or at some location where satellite signals cannot be received. The GPS receiver 34 preferably also collects and stores fresh almanac data periodically as well, although it need not be gathered as often, such as once per week.

5 When the driver approaches the vehicle and activates the remote entry remote 44, the detection circuitry 50 detects the transient generated by the door lock actuators on the vehicle electrical system and generates a warmup signal, which is sent to the CPU 22 and the other electrical components. In state 94, the presence of the driver is detected and the CPU 22 boots up and starts the hard drive spinning 28. The other
10 electrical components begin their warmup period as well. The display 24 switches to a full power mode and warms up in a few seconds. The GPS receiver 34 receives signals from the GPS satellite and may begin calculating a GPS position solution. The other sensors, such as the gyroscope 36, compass 38, and wheel speed sensor 40 begin their warmup period as well, switching to full power. The navigation system 20 is fully
15 operational and can monitor the initial actions taken by the driver by the time the driver enters the vehicle and starts the engine.

 When the driver starts the engine, the detection circuitry 50 detects the AC content in the vehicle electrical system or battery 48 and the navigation system 20 enters state 96. The AC content is a result of transients generated by the ignition system
20 primary circuit and charge pulses from the generator/alternator. When a peak to peak voltage exceeding the predetermined threshold, such as 200 millivolts, is detected by the microcontroller 56, the detection circuitry 50 determines that the engine is running and the navigation system 20 remains at full power. If the detection circuitry 50 determines that the engine is not running within a predetermined time period of
25 detecting the presence of the driver, preferably 30 to 90 seconds, the detection circuitry 50 generates a signal to the CPU 22 and other electrical components to reenter low power mode in state 90. If the detection circuitry 50 determines that the vehicle 32 is still occupied (such as by monitoring the accelerometer 41) even though the engine is not running, the navigation system 20 preferably remains at full power for some
30 extended predetermined time period.

 The navigation system 20 of the present invention has improved power up performance. The navigation system 20 is powered up earlier, by anticipating its use by sensing the presence of the driver. The navigation system 20 further includes

improved detection circuitry 50 for determining whether the engine is running. The detection circuitry 50 for the presence of the driver and the running engine simply monitors the power supply, without the need to connect an extra wire to the ignition switch. Further, the navigation system 20 maintains fresh ephemeris data by periodically exiting sleep mode to receive a satellite signal. The improved navigation system 20 will determine the present position of the vehicle 32 and monitor the initial actions taken by a driver of the vehicle 32 after the engine is started.

In accordance with the provisions of the patent statutes and jurisprudence, exemplary configurations described above are considered to represent a preferred embodiment of the invention. However, it should be noted that the invention can be practiced otherwise than as specifically illustrated and described without departing from its spirit or scope.

WHAT IS CLAIMED IS:

1. An electrical system for a vehicle comprising:
a first electrical component having a low power mode and a full power mode,
5 said first electrical component requiring a warmup period of time to switch from said low power mode to said full power mode;
detection circuitry for detecting the presence of a driver of the vehicle and generating a warmup signal based upon said detection; and
said first electrical component receiving said warmup signal and beginning said
10 warmup period based upon said warmup signal.
2. The electrical system for a vehicle of Claim 1 wherein said first electrical component is a hard drive.
- 15 3. The electrical system for a vehicle of Claim 1 wherein said first electrical component is part of a vehicle navigation system.
4. The electrical system of Claim 3 wherein said first electrical component is a motionsensor.
20
5. The electrical system of Claim 3 wherein said first electrical component is a GPS receiver, said GPS receiver initiating a GPS solution based upon said warmup signal.
6. The electrical system of Claim 5 wherein said GPS receiver stores satellite
25 ephemeris data, said GPS receiver switching from low power mode to full power mode and collecting and storing fresh satellite ephemeris data if a predetermined time has elapsed since said satellite ephemeris data was stored.
7. The electrical system for a vehicle of Claim 1 further including:
30 a running engine detector generating an engine signal when the engine of the vehicle is running; and
said first electrical component returning to said low power mode if said engine signal is not generated within a first time period of said warmup signal.

8. The electrical system for a vehicle of Claim 7 wherein said first electrical component remains in said full power mode after said first time period based upon a determination that the vehicle is occupied.

5 9. The electrical system of Claim 7 wherein said detection circuitry receives said engine signal, said detection circuitry generating said warmup signal based upon said engine signal.

10 10. The electrical system of Claim 7 wherein said running engine detector monitors a characteristic of a vehicle power supply signal.

11. The electrical system of Claim 1 wherein said detection circuitry includes a driver sensor for detecting the presence of a driver.

15 12. The electrical system of Claim 11 wherein said detection circuitry includes a remote entry device.

13. The electrical system of Claim 11 wherein said detection circuitry monitors a power supply to determine the presence of the driver.

20 14. A method for operating a navigation system for a vehicle including the steps of:
a. maintaining an electrical component of a navigation system in a low power mode when the navigation system is not being utilized and an engine in the vehicle is not running;

25 b. predicting when said navigation system will be utilized;
c. generating a warmup signal based upon said prediction; and
d. switching said electrical component from said low power mode to an operating mode based upon said warmup signal,
said steps b-d being performed prior to the engine in the vehicle running.

30 15. The method for operating a navigation system of Claim 14 wherein said step b further includes the step of detecting the presence of a driver of the vehicle.

16. The method for operating a navigation system of Claim 14 wherein said step b further includes the step of monitoring an AC content of a vehicle power supply.

5 17. The method for operating a navigation system of Claim 14 wherein said step d further includes the step of starting a hard drive.

18. The method for operating a navigation system of Claim 14 wherein said step d further includes the step of deriving a GPS solution.

10 19. The method for operating a navigation system of Claim 14 further including the steps of:

e. detecting whether an engine of the vehicle is running after said warmup signal is generated; and

15 f. returning said electrical component to said low power mode if said engine is not running within a predetermined time period of said warmup signal.

20. The method for operating a navigation system of Claim 19 further including the steps of:

detecting the presence of said driver in said vehicle;

20 remaining in said operating mode after said predetermined time period based upon said detection of said driver in said vehicle.

21. The method for operating a navigation system of Claim 19 wherein said step e further includes the step of monitoring an electrical power signal from a vehicle power supply associated with said engine.

22. The method for operating a navigation system of Claim 21 wherein said step e further includes the step of monitoring an AC content of said electrical power signal.

30 23. The method for operating a navigation system of Claim 22 wherein said step e further includes the step of comparing said AC content to a predetermined value.

24. The method for operating a navigation system of Claim 23 further including the step of switching said electrical component to said low power mode based upon detecting that said engine is not running in step e.

5 25. The method for operating a navigation system of Claim 14 further including the steps of:

e. storing satellite ephemeris data;

f. switching a GPS receiver from low power mode to full power mode and collecting and storing fresh satellite ephemeris data if a predetermined time has elapsed since said step e).

10

26. A device for detecting whether a vehicle engine is running comprising:
an input terminal for connecting to a vehicle power supply;
means for detecting the presence of a fluctuating electrical signal on said input terminal;

15

means for analyzing said fluctuating electrical signal and generating an engine running signal based upon said analysis.

20




27. The device for detecting whether a vehicle engine is running of Claim 26 further including a high pass filter removing a DC component of said electrical signal on said input terminal.


25

28. The device for detecting whether a vehicle engine is running of Claim 26 further including prediction means for predicting that an engine will be running and generating a warmup signal based upon said prediction.

29. The device for detecting whether a vehicle engine is running of Claim 28 wherein said prediction means comprises means for detecting the presence of a driver of the vehicle.

30. A GPS receiver storing satellite ephemeris data, said GPS receiver having a low power mode and a full power mode, said GPS receiver switching from low power mode to full power mode and collecting and storing fresh satellite ephemeris data if a predetermined time has elapsed since said satellite ephemeris data was stored.

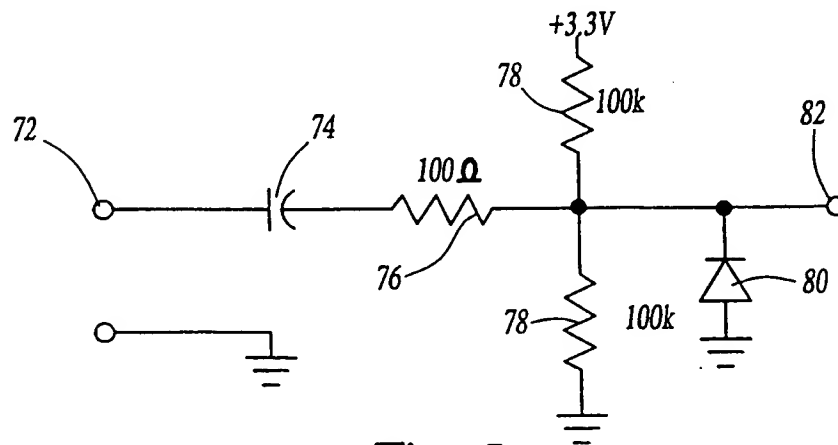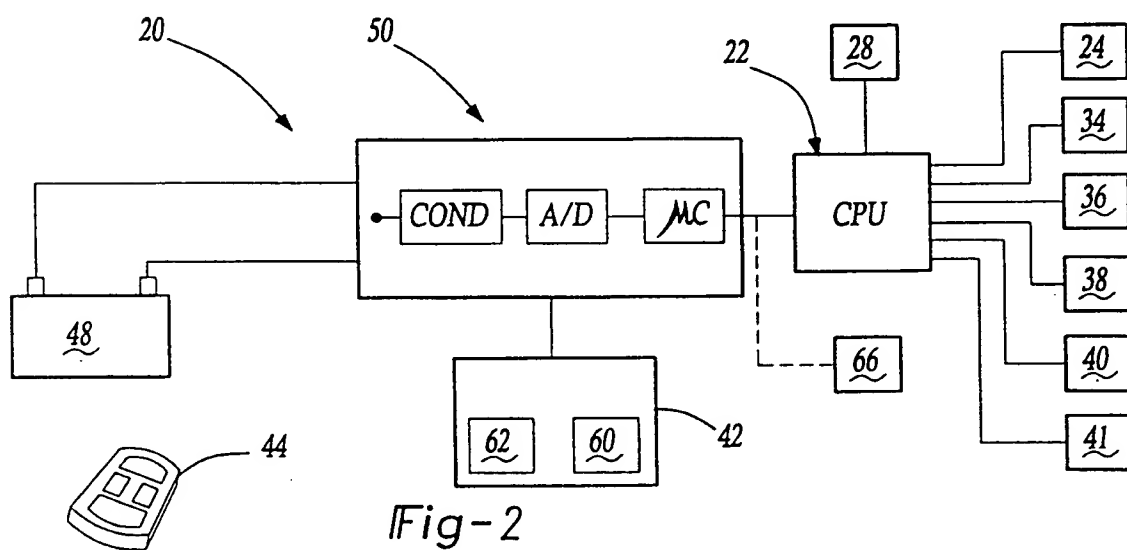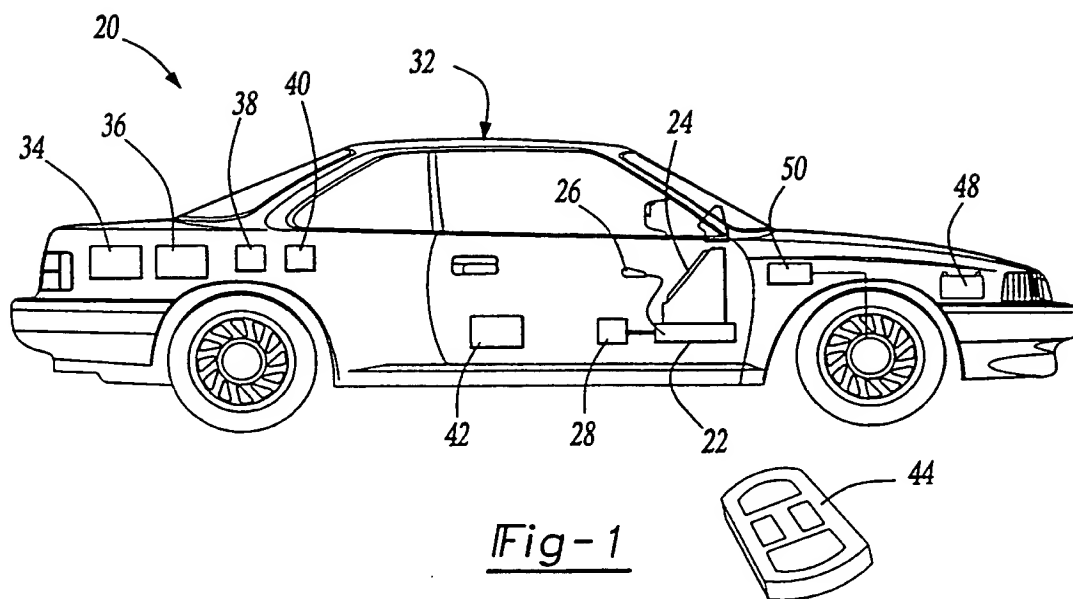

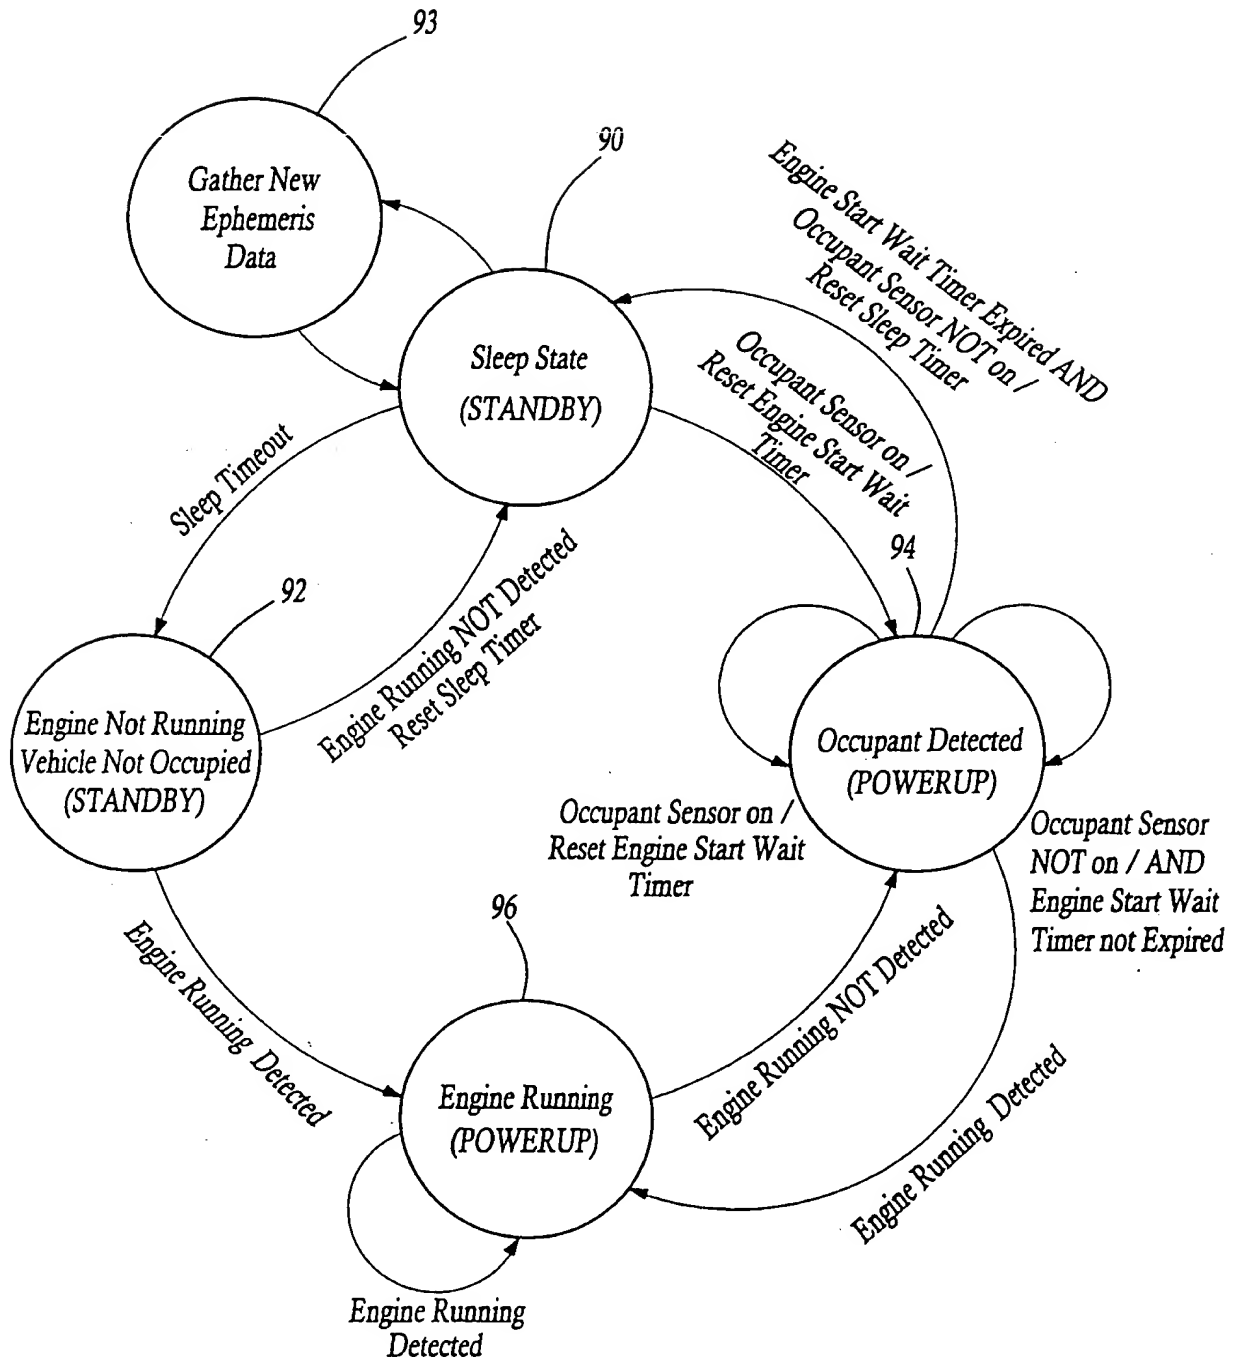Fig-4**SUBSTITUTE SHEET (RULE 26)**

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/07424

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01C21/20 G06F1/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01C G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 531 123 A (TAGAMI KATSUTOSHI ET AL) 23 July 1985	14
Y	see abstract	1, 3, 4, 11, 15, 16, 25
	see column 5, line 9 - line 21 ---	
Y	DE 41 14 642 A (KEESMANN TILL) 5 November 1992	1, 3, 4, 11, 15
	see column 1, line 34 - line 59 ---	
X	PATENT ABSTRACTS OF JAPAN vol. 095, no. 003, 28 April 1995 & JP 06 341851 A (TOSHIBA CORP), 13 December 1994	26, 27
Y	see abstract ---	16
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

23 June 1999

Date of mailing of the international search report

01/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hoekstra, F

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/07424

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4531123	A	23-07-1985	JP 57200812 A	09-12-1982
			DE 3221210 A	10-02-1983
			FR 2507314 A	10-12-1982
			GB 2102949 A,B	09-02-1983
DE 4114642	A	05-11-1992	DE 9202965 U	23-07-1992
US 5418537	A	23-05-1995	US 5777580 A	07-07-1998
EP 0701196	A	13-03-1996	US 5675810 A	07-10-1997
			US 5669004 A	16-09-1997
			US 5666541 A	09-09-1997
US 5222245	A	22-06-1993	JP 3269385 A	29-11-1991
			DE 69111275 D	24-08-1995
			DE 69111275 T	08-02-1996
			EP 0447978 A	25-09-1991

THIS PAGE BLANK (USPTO)

1/2

